


ADS1000C & CA Series

DIGITAL STORAGE OSCILLOSCOPE

25MHz / 60MHz / 100MHz / 150MHz

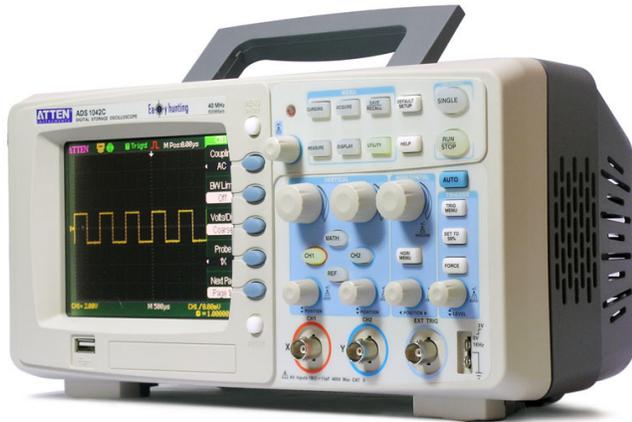

FEATURES

- 500MSa/s & 1GSa/s Sampling Rate
- 2 Channels
- 5.7in LCD Color Display
- USB Host/Device: Support USB Printer and USB Flash Drive
- PictBridge Function
- Easyscope Software
- 11 Languages

APPLICATIONS

- Industrial Power Design, Troubleshooting, Installation, and Maintenance.
- Electronics Design, Troubleshooting, Installation, and Maintenance
- Circuit Design & Debug
- Educational Lab & Training Institutions
- Repair & Service
- Production Test & Quality Inspection

CHARACTERISTIC:

- The highest Single real-time sampling rate can up to 1GSa/s; Equivalent sampling rate is up to 50GSa/s.
- Memory Depth:40Kpts
- Max recording length:6Mpts
- Trigger types: Edge, Pulse Width, Video, Slope, Alternative
- Unique Digital Filter function and Waveform recorder function
- Support Pass/Fail function.
- Thirty two parameters Auto measure function.
- Save/recall types: Setups, Waveforms, CSV file, Picture.
- Support Multilingual On-line help system
- Waveform Intensity and Grid Brightness can be adjusted.
- Support twelve types Language
- Standard Configuration Port:
 USB Host: Support USB flash driver save/recall function and update firmware;
 USB Device: Support PictBridge compatible printer and support PC remote control;
 RS232, Pass/ Fail output

MODEL INDEX	ADS1152CA	ADS1102CA	ADS1062CA	ADS1022C
Bandwidth	150MHz	100MHz	60MHz	25MHz
Sampling Rate	1GSa/s			500MSa/s
Equivalent Sampling Rate	50GSa/s			
Memory Depth	Single Channel: 2M; Double Channels: 1M/CH			
Rise Time	<2.3ns	<3.5ns	<5.8ns	<14ns
Input Impedance	1MΩ 13pF			
Sec/div Range	2.5ns/div-50s/div		5ns/div-50s/div	25ns/div-50s/div
	Scan: 100ms-50s/div			
Display	Color LCD (320*234)5.7" LCD			

FEATURES

Abundant Trigger Function

ADS1000 series products have rich trigger modes: Edge, Pulse, Video, Slope, Alternative and Delay trigger mode, which satisfy with users more extensive needs. Alternative trigger mode is usually used to observing two non-correlated signals at the same time and users can select different trigger mode for two channels, which is a kind reproduction that analog oscilloscope function in the digital oscilloscope.

FFT Waveform Split Display Function

FFT waveform and its Channel waveform can display on split screen at the same time. In split display mode, the screen is divided into two parts and each part is divided eight divides in vertical direction. That is similar to under the entire screen pattern simultaneously to observe two waveforms. This way will make users observe waveforms to be clearer and convenient.

Pop-up Menu Display Mode

The menu may hide as necessary make waveforms display on 12 divides full screen. Comparing with other same level digital oscilloscopes, this kind of pattern is more flexible, the user operation is more convenient and users can observe waveforms clearly.

Auto Measure Function

ADS1000 series can auto measure thirty two parameters, which is most in the same level digital oscilloscopes. Auto measure function can eliminate user error consumedly, and users will measure parameters what they need faster and more accurately using it. ADS1000 series also have all measurement function that displays all the waveform parameters on the screen according to measure kinds, and users can ready measure parameters value expediently. So ADS1000 series are your most perfect measure tools in current market.

Cursor Survey Function

ADS1000 series cursor survey function has three kinds of modes: Auto manual mode, Track mode, Auto mode. The user may according to own need to choose the survey pattern nimbly, thus with ease read measure results from the top right of the screen or experience completely automatic intelligent design pattern.

Digital Filter Function

ADS1000 series provide a digital filter function, and users can use it setting upper limit and lower limit of frequency to reduce signal noise and filter error signal. So they can observe their interested signals distinctly, which will advance users' work efficiency consumedly.

Waveform Recorder Function

Using this function, Users can continue record data of their need signals as the form of frame. Waveform recorder can record input waveform from CH1 and CH2, with maximum record length of 1500 frames. This record behavior can also be activated by the pass/fail test output, which makes this function especially useful to capture abnormal signals in long term without keeping an eye watching it.

Pass/Fail Function

Users may use the Pass/Fail function which the ADS1000 series provides to carry on the product test. Through a series of setups, the oscilloscope can output the test result automatically which enhanced the product production efficiency greatly.

Display

ADS1000 series products use the colored TFT LCD. The screen display parameter value and the waveform are clearer, stably and nature; That is also more advantageous to alleviate tiredness of users using the instrument extended periods at a time.


Multi-country Language User Interface Display function

ADS1000 series product has 11 languages user interface display function: Simplified Chinese, Traditional Chinese, English, Arabic, French, German, Russian, Spanish, Portuguese, Japanese and Korean, which has further developed the ADS1000 series product international market and has laid the foundation for ADS1000 series making for the international well-known brand products.

Powerful EasyScope3.0 Software

EasyScope3.0 software is the powerful system software suitable for ADS1000 series products. This software can be compatible RS-232 and USB Device to realize communication between the computer and the oscilloscope, then realizes long-distance control. Simultaneously this software can automatic real-time refresh waveform data, provide waveforms measure data sampling data, screen images read storage and printing functions. In addition

EasyScope3.0 also has setups upload and download function. Most quickly basing on millisecond level interactive between PC and ADS1000 series make users to be easier to analyze, research waveforms and data.

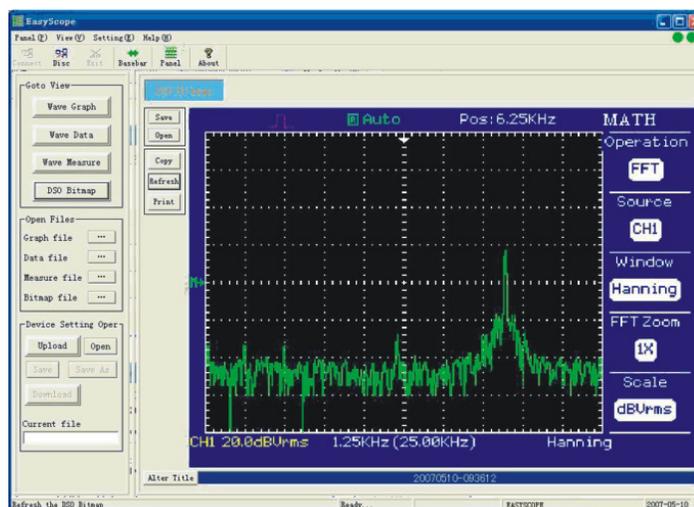

EasyScope3.0 Software interface

Input		
Input Coupling		AC, DC, GND
Input Impedance		DC: 1MΩ+/-2% 17pF +/-3pF AC: 1.2MΩ+/-2% 17pF +/-3pF, <=100mV/div 1.0MΩ+/-2% 17pF +/-3pF, >100mV/div
Maximum Input Voltage		±400V PK-PK CATI
Ch to Ch Isolation (Both channels in same V/div setting)		>100: 1 at 50MHZ (ADS1102CA) >100: 1 at 30MHZ (ADS1062CA)
Probe attenuator		1X, 10X
Probe attenuator		1X, 10X, 100X, 1000X

Horizontal System		
Real Time Sampling Rate		2CH: 500MS/s
Equivalent Sampling Rate		50GSa/s
Measure Display Modes		MAIN, WINDOW, WINDOW ZOOM, Scan, X-Y
Timebase Accuracy		±100ppm measured over 10ms interval
Time Window		12 Divisions
Horizontal Scan Range		2.5ns/div -50s/div (ADS1102CA) 5.0 ns/div -50s/div (ADS1062CA) Scan: 100ms/div -50s/div (1-2.5-5 sequence)

Vertical System		
Vertical Sensitivity		2Mv-10V/div at input BNC(1-2-5 order)
Channel voltage offset range		2mv-200mv: ±1.6V 206Mv-10V: ±40V in Fixed Gain Ranges & Variable Gain Ranges
Vertical Resolution		8 bit
Channels		2
Analog Bandwidth (at input BNC)		100MHz (ADS1102CA) 60MHZ (ADS1062CA)
BW Flatness		DC-10% of rated BW: ±1DB 10%-50% of rated BW: ±2DB 50%-100% of rated BW: ±3DB
Lower frequency limit (AC -3dB)		≤10Hz(at input BNC)
Noise: Pk-Pk for 3K record		≤0.6Div for average of 10Pk-Pk readings in fixed gain settings. ≤0.7 Div for average of 10 Pk-Pk readings, Variable gain settings
SFDR including harmonics		≥40dB
DC Gain Accuracy		<±3.0%: 5mv/div to 5V/div in Fixed Gain Ranges <±4.0%:typical for 2mv/div and Variable Gain Ranges
DC Measurement Accuracy: All Gain settings≤100mv/div		±[3%X (reading + offset) +1% of offset +0.2div+2mv] +0.2div+2mv]
DC Measurement Accuracy: All Gain settings>100mv/div		±[3%X (reading + offset) +1% of offset +0.2div+100mv]
Rise time, Typical (using 500ps pulse)		<3.5ns (ADS1102CA) <5.8ns (ADS1062CA)
Math operation		+, -, *, FFT
FFT		Window mode: Hanning, Hamming, Blackman, Rectangular Sampling points: 1024
Bandwidth limiter		20MHZ±40% Typical(Note: BW limited below 20MHZ±40% when using probe X1)

Trigger System

Trigger Types	Edge, Pulse Width, Video, Slope, Alternative
Trigger Modes	Auto, Normal, Single
Trigger Sources	Ch1-2, EXT, EXT/5, AC Line
Trigger Coupling	AC, DC, LF rej, HF rej
Trigger Level Range	CH1, CH2: ± 6 divisions from center of screen EXT: $\pm 1.2V$ EXT/5: $\pm 6V$
Trigger Level Accuracy (typical) applicable for the signal of rising and falling time $\geq 20ns$	Internal: $\pm(0.2 \text{ div} \times V/\text{div})$ (within ± 4 divisions from center of screen) EXT: $\pm(6\% \text{ of setting} + 40 \text{ mV})$ EXT/5: $\pm(6\% \text{ of setting} + 200 \text{ mV})$
Edge Trigger	Edge type: Rising, Falling, Rising and Falling
Pulse Width Trigger	Trigger Modes: (>, <, =) Positive Pulse Width, (>, <, =) Negative Pulse Width Pulse Width Range: 20ns-10s
Video Trigger	Support signal Formats: PAL/SECAM, NTSC Trigger condition: odd field, even field, all lines, line Num
Slope Trigger	(>, <, =) Positive slope, (>, <, =) Negative Slope Time: 20ns-10s
Alternative Trigger	CH1 trigger type: Edge, Pulse, Video, Slope CH2 trigger type: Edge, Pulse, Video, Slope

Control Panel Function

Auto Set	Auto adjusting the Vertical, Horizontal system and Trigger Position
Save/Recall	Support 2 Group referenced Waveforms, 20 Group setups, 20 Group captured Waveforms internal Storage/Recall function and USB flash driver storage function.

Hard Ware Frequency Counter

Reading resolution	6 Bytes
Accuracy	$\pm 0.01\%$
Range	DC Couple, 10HZ to MAX Bandwidth
Signal Types	Satisfying all Trigger signal (Except Pulse width trigger and Video Trigger)

Acquisition System

Sample Types	Real time, Equivalent time		
Memory Depth	Channel Mode	Sampling Rate	Short memory
	Single Channel	1Gsa/s	40kpts
	Single Channel	500MSa/s or lower	20kpts
	Double Channels	500MSa/s or lower	20kpts
Sample Mode	Sample, Peak Measure, Average		
Averages	4,16,32,64,128,256		

Measure System

Auto Measure	Vpp, Vmax, Vmin, Vamp, Vtop, Vbase, Vavg, Mean, Crms, Vrms, ROVShoot, FOVShoot, RPRESshoot, FPRESshoot, Rise time, Fall time, Freq, Period, +Wid, -Wid, +Dut, -Dut, Bwid, Phase, FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF
Cursor Measure	Manual mode, Track mode and Auto mode

GENERAL SPECIFICATIONS

Display		
Display Mode	Color TFT 5.7in.(145mm) diagonal Liquid Crystal Display	
Resolution	320 horizontal by 234 vertical pixels	
Display Color	64K color	
Display Contrast (Typical state)	150:1	
Backlight Intensity (Typical state)	300nit	
Wave display range	8 x 12 div	
Wave Display Mode	Point, Vector	
Point, Vector	Off, 1 sec, 2 sec, 5 sec, Infinite	
Menu Display	2 sec, 5 sec, 10 sec, 20 sec, Infinite	
Skin	Succinct	
Screen saver	1min, 2min, 5min, 10min, 15min, 30min, 1hour, 2hour, 5hour, off	
Waveform Interpolation	Sin(x)/x, Linear	
Color model	Normal , Invert	
Language	English, French, German, Russian, Spanish, Simplified Chinese, Traditional Chinese, Portuguese, Japanese, Korean, Italian, Arabic	
Interface	USB Host, USB Device, RS232, Pass/Fail output	

Environments		
Temperature	Operating: 10°C to + 40°C Not operating: -20°C to +60°C	
Humidity	Operating: 85%RH, 40°C, 24 hours Not operating: 85%RH, 65°C, 24 hours	
Height	Operating: 3000m Not operating: 15,266m	

Power Supply		
Input Voltage	100-240 VAC, CAT II, Auto selection	
Frequency Scope	45Hz to 440Hz	
Power	50VA Max	

Mechanical						
Dimension	Length	305mm	Width	133mm	Height	154mm
	Weight	2.3 kg				

We pursue a policy of continuous development and product improvement. Thus the specifications and picture in this Spec sheet and control location on the front Panel may be changed.



ATTEN ELECTRONICS CO., LTD.
Building A29, Tanglang Industrial Zone, Xili
Nanshan, Shenzhen 518055
P.R.China

Tel.: +86-755-86021376, Fax: +86-755-61618291
Sales & Support : atten@atten.com.cn

ATTEN[®]
INSTRUMENTS